

## Long sensing distance type proximity sensor

### ■ Features

- Sensing up to as 50mm
- Improved the noise resistance with dedicated IC
- Built-in reverse polarity protection circuit, surge protection circuit, overcurrent protection circuit
- Wide range of power supply : 12-48VDC (Voltage range : 10-65VDC)
- Simultaneous output of Normal Open+Normal Close
- Built-in power indicator and operation indicator
- Protection structure IP67(IEC standard)



⚠ Please read "Caution for your safety" in operation manual before using.



### ■ Type

#### ◎ DC 4-wire long distance type

Appearance	Model
	AS80-50DN3
	AS80-50DP3

### ■ Specification


Model	AS80-50DN3	AS80-50DP3
Sensing type	NPN Normally Open + Normally Closed	PNP Normally Open + Normally Closed
Sensing distance	50mm	
Hysteresis	Max. 15% of sensing distance	
Standard sensing target	150×150×1mm(Iron)	
Setting distance	0 to 35mm	
Power supply (Operating voltage)	12-48VDC (10-65VDC)	
Current consumption	Max. 20mA	
Response frequency <sup>※1</sup>	30Hz	
Residual voltage	Max. 2V	
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C	
Control output	Max. 200mA	
Insulation resistance	Min. 50MΩ(at 500VDC megger)	
Dielectric strength	1500VAC 50/60Hz for 1 minute	
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours	
Shock	500m/s <sup>2</sup> (approx. 50G) in X, Y, Z direction for 3 times	
Indicator	Power indicator: green LED, Operation indicator: yellow LED	
Environment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH
Protection circuit	Surge protection circuit, Reverse polarity protection circuit, Overcurrent protection circuit	
Cable	ø5, 4-wire, 2m(AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator diameter: ø1.25)	
Approval	CE	
Protection	IP67(IEC standard)	
Unit weight	Approx. 470g	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.


※Environment resistance is rated at no freezing or condensation.

## ■ Dimensions

(unit: mm)

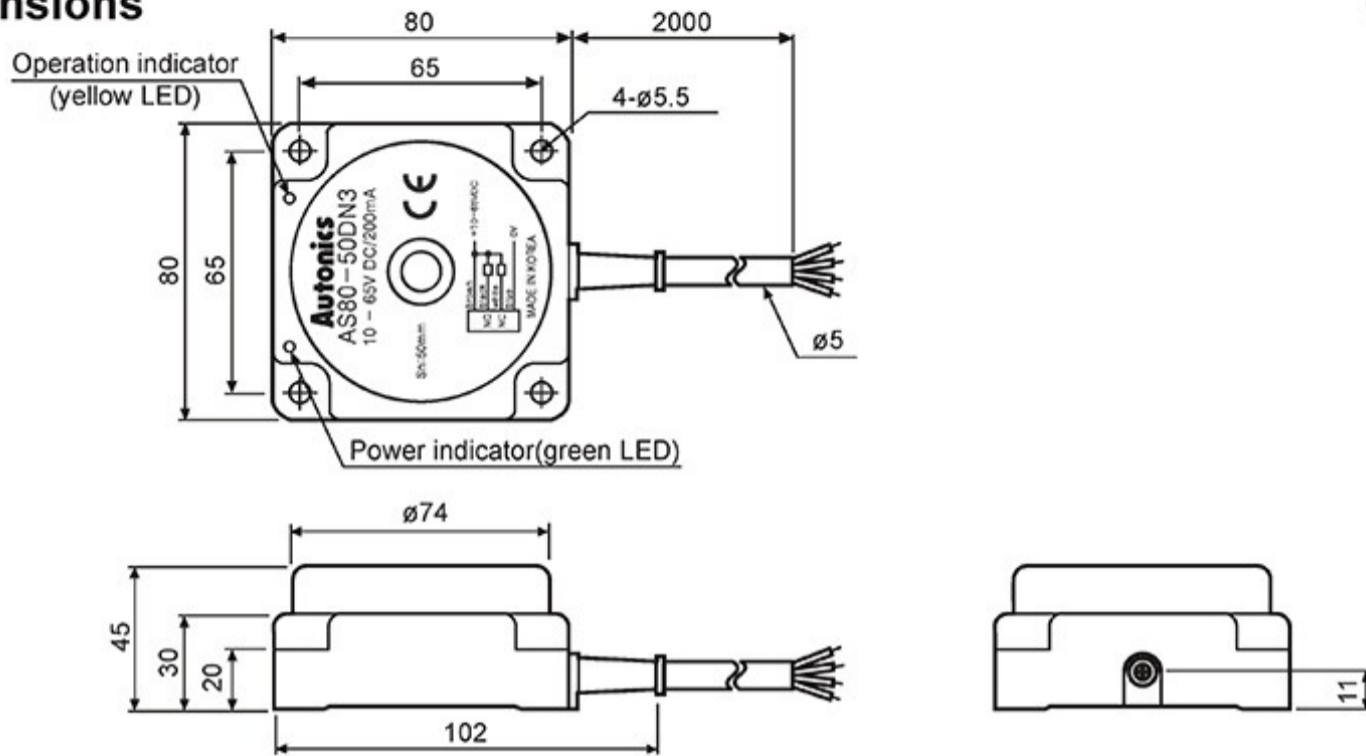


## ■ Control output diagram

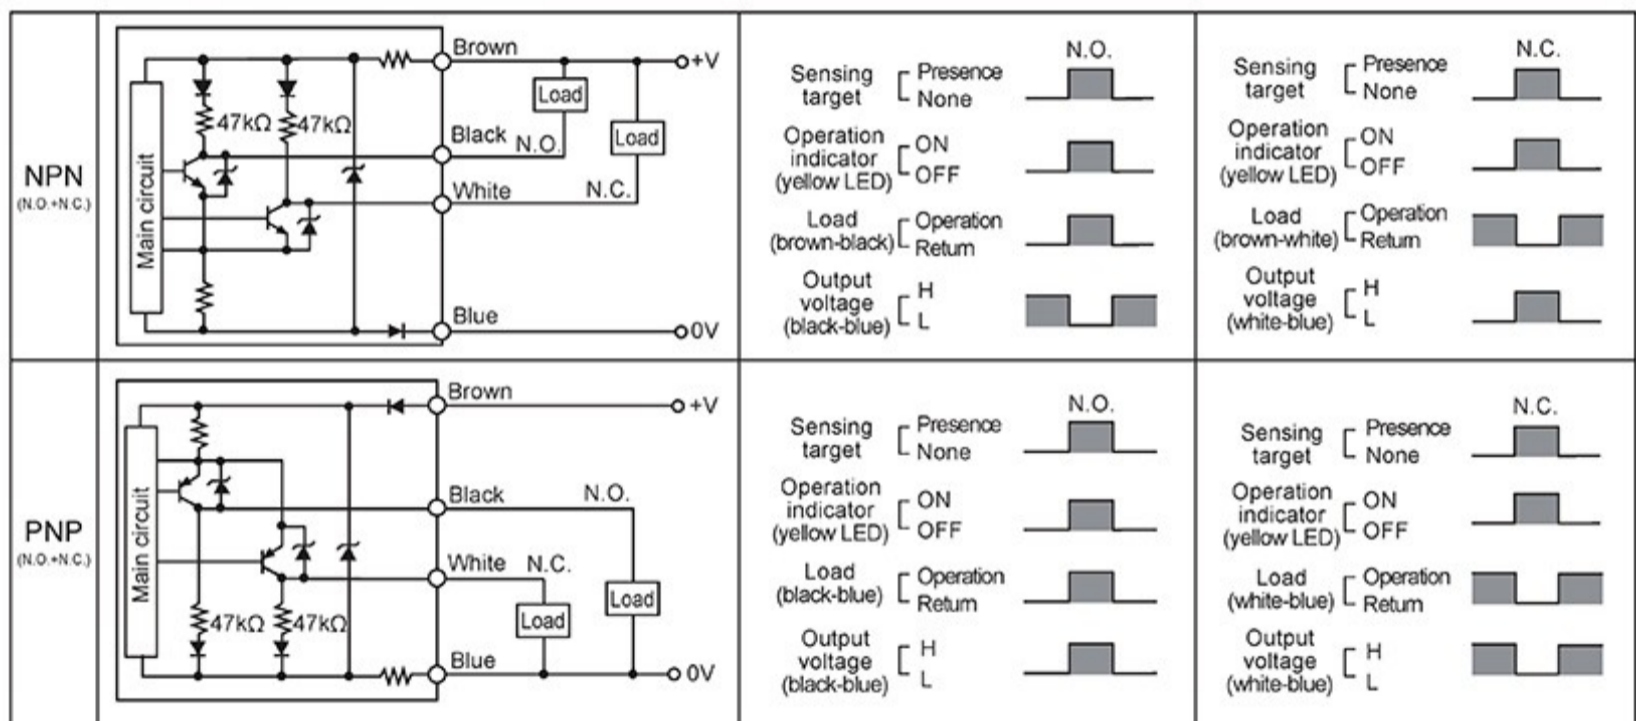

## ■ Mutual-interference & Influence by surrounding metals


### ◎ Mutual-interference

When several proximity sensors are mounted close to one another a malfunction of the sensor may be caused due to mutual interference. Therefore, be sure to provide a minimum distance between the two sensors as below chart indicates.

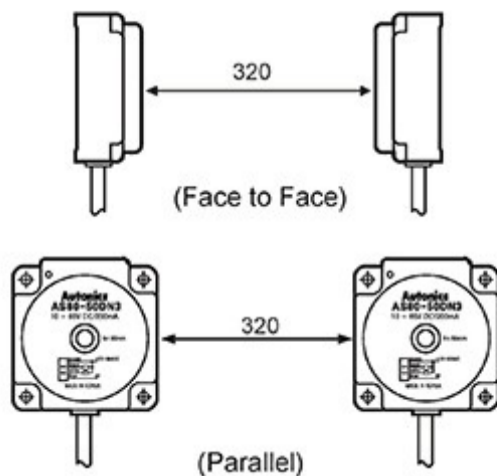

### ◎ Influence by surrounding metals

When sensors are mounted on metallic panel, you must prevent the sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

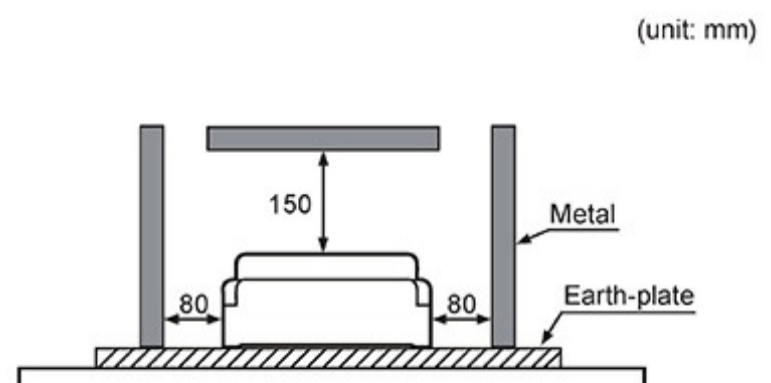

- (A) Photo electric sensor
- (B) Fiber optic sensor
- (C) Door/Area sensor
- (D) Proximity sensor
- (E) Pressure sensor
- (F) Rotary encoder
- (G) Connector/Socket
- (H) Temp. controller
- (I) SSR/Power controller
- (J) Counter
- (K) Timer
- (L) Panel meter
- (M) Tacho/Speed/ Pulse meter
- (N) Display unit
- (O) Sensor controller
- (P) Switching mode power supply
- (Q) Stepper motor& Driver&Controller
- (R) Graphic/ Logic panel
- (S) Field network device
- (T) Software
- (U) Other